

N^o 203-4

Passenger and Cargo twin screw steel steamer

Speed - 32.5 knots 100 A.L.F.

Watertight Bulkheads

SCALE 1/20



Partial 21. B. 96 134-135

R.T. = 6.48

21. B. 96 163

R.T. = 6.93

Partial 21. B. 96 34-36

R.T. = 5.90

Partial 21. B. 96 53-54

R.T. = 5.72

21. B. 96 77







R.T. = 5.74

B = 14.17

L = 14.17

Partial 21. B. 96 93-107

R.T. = 5.93

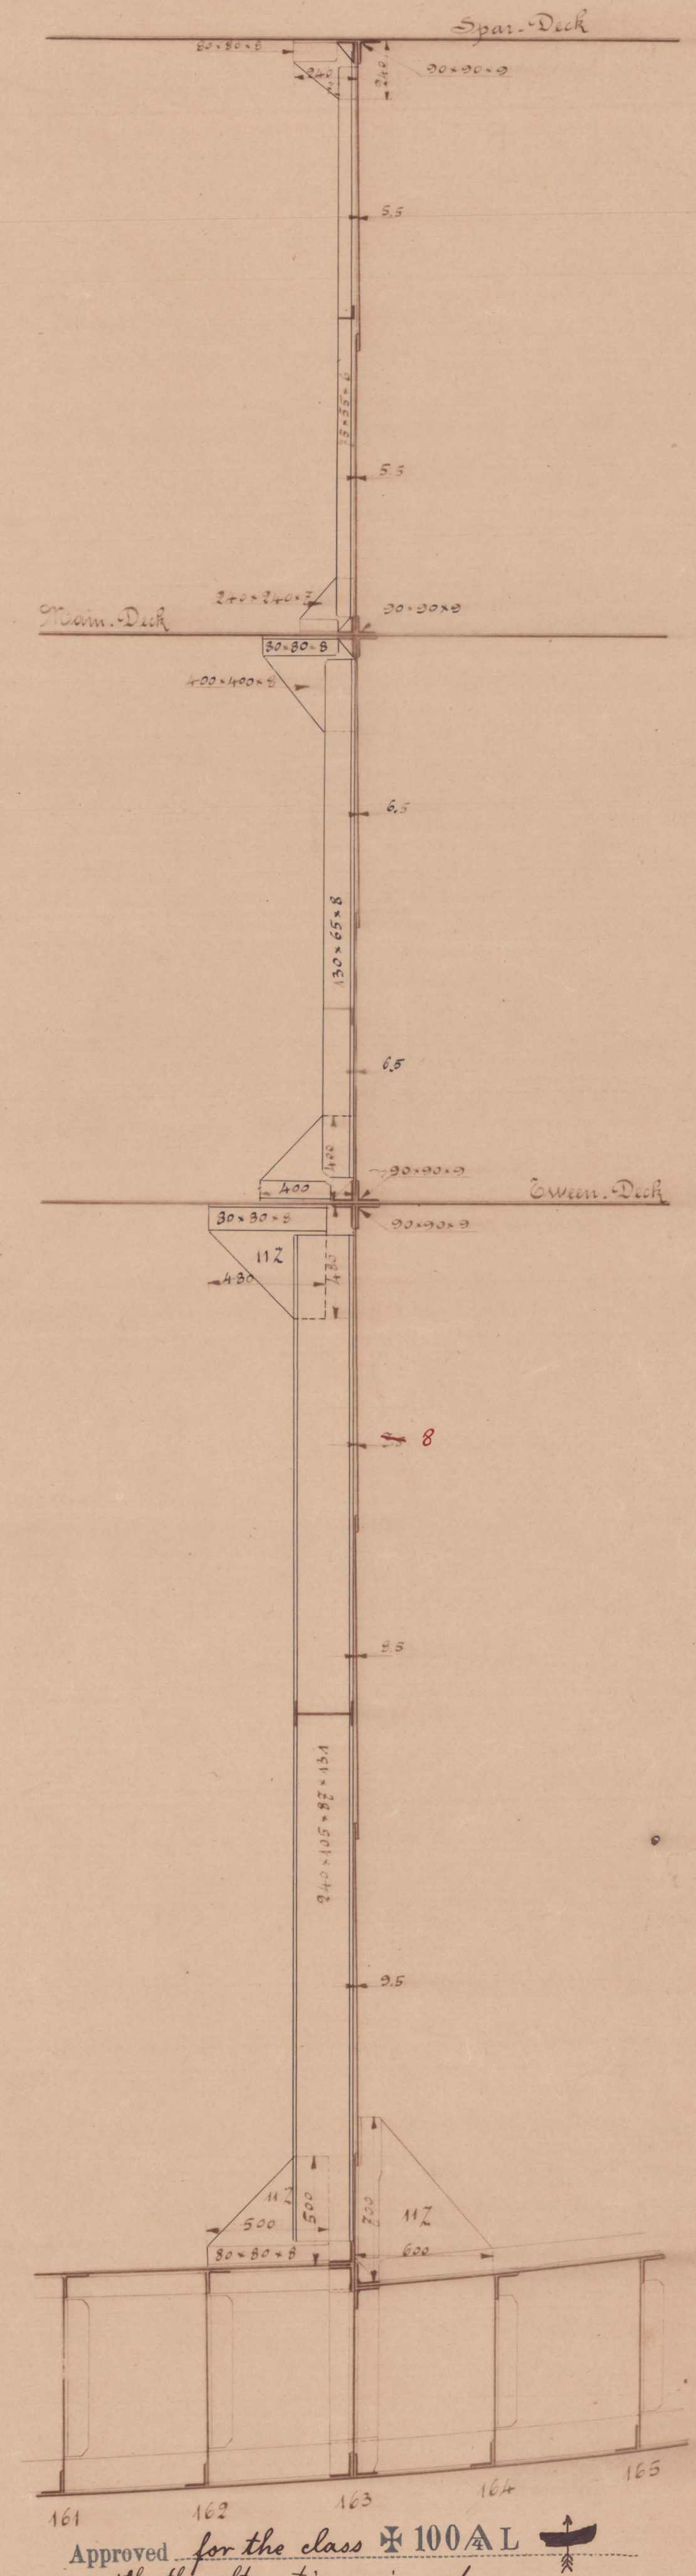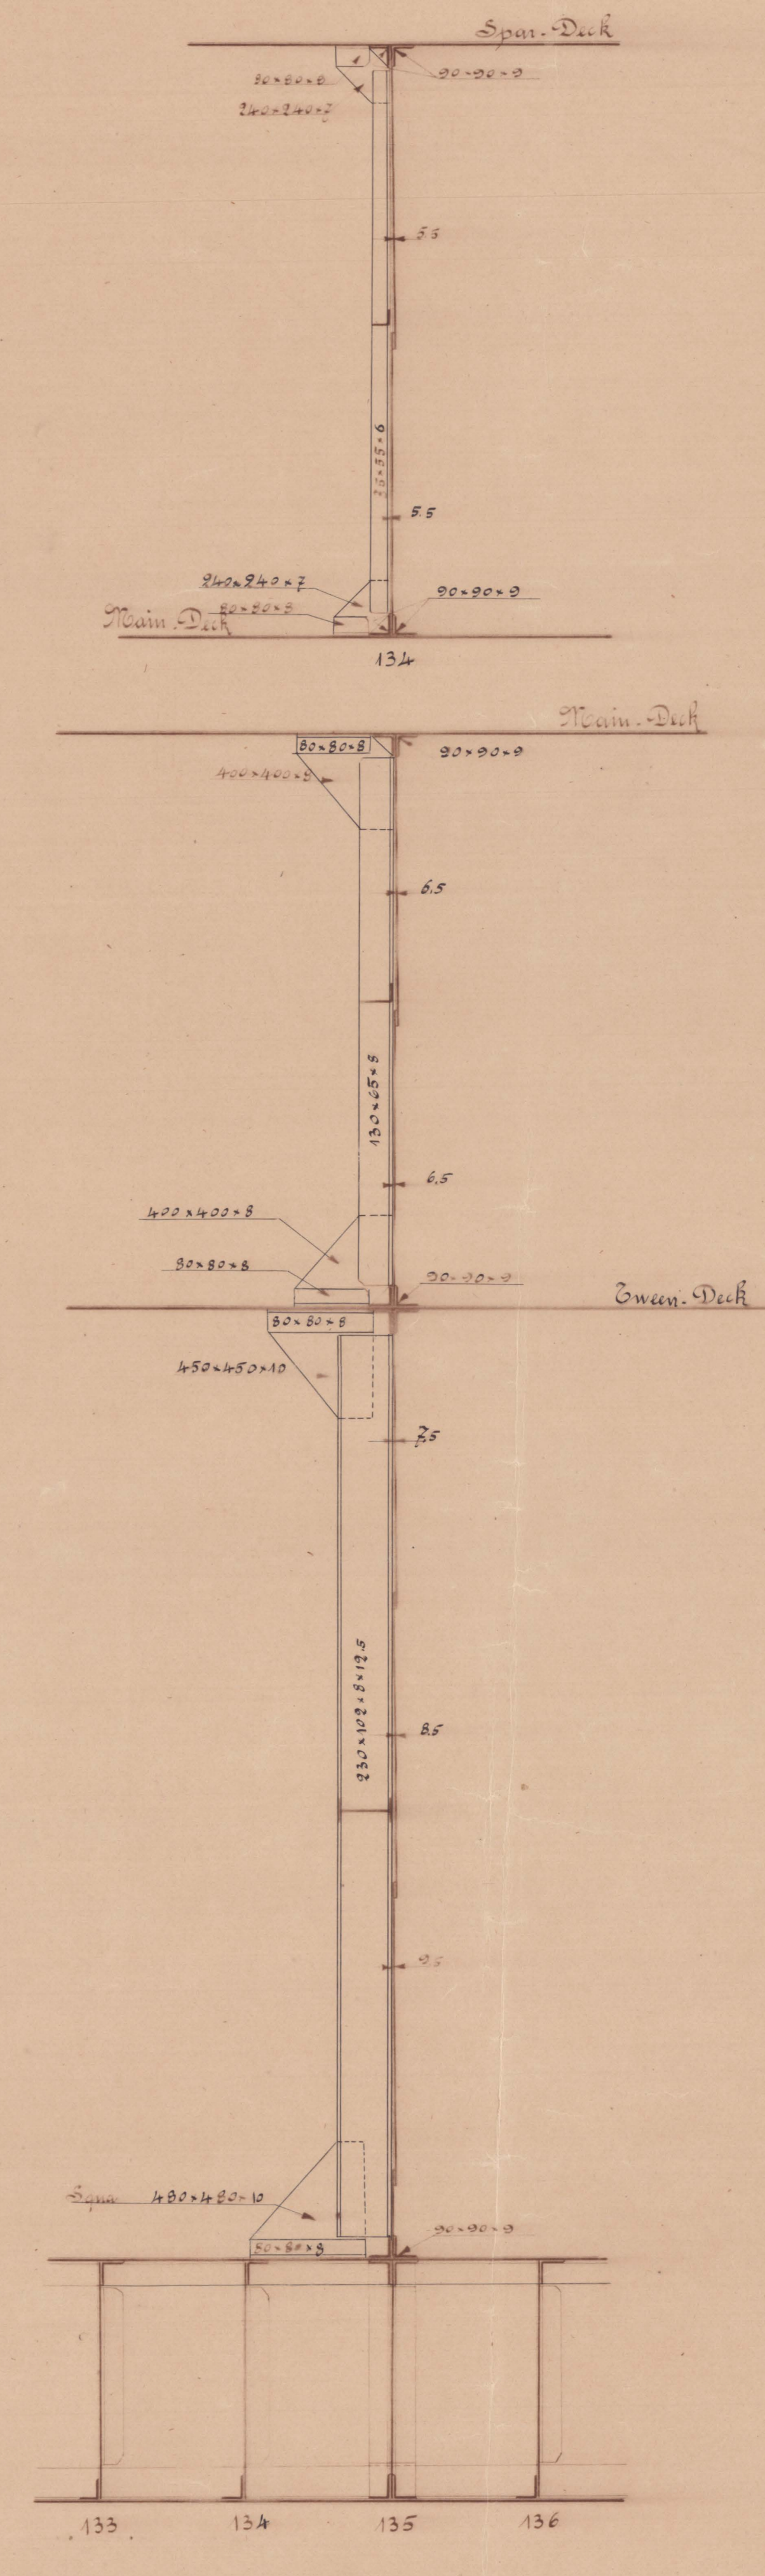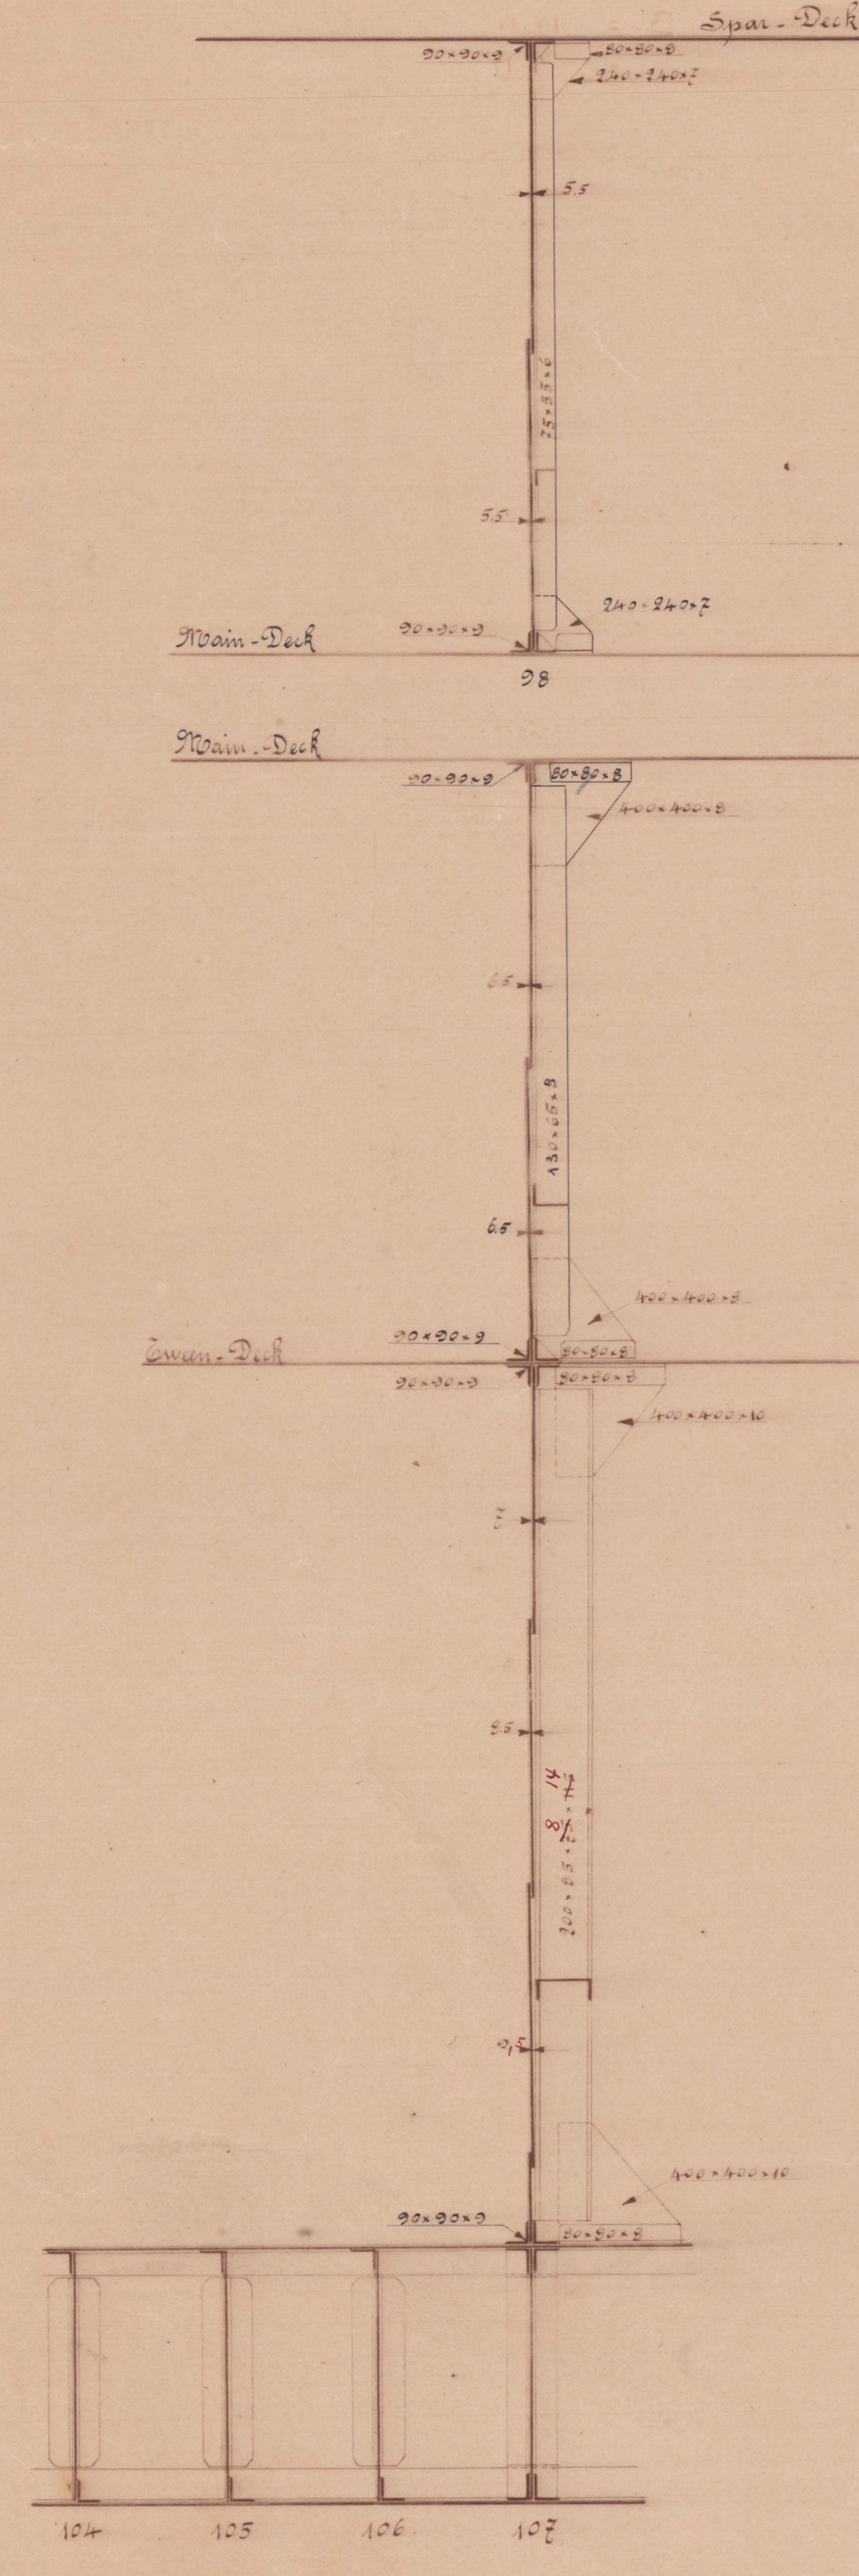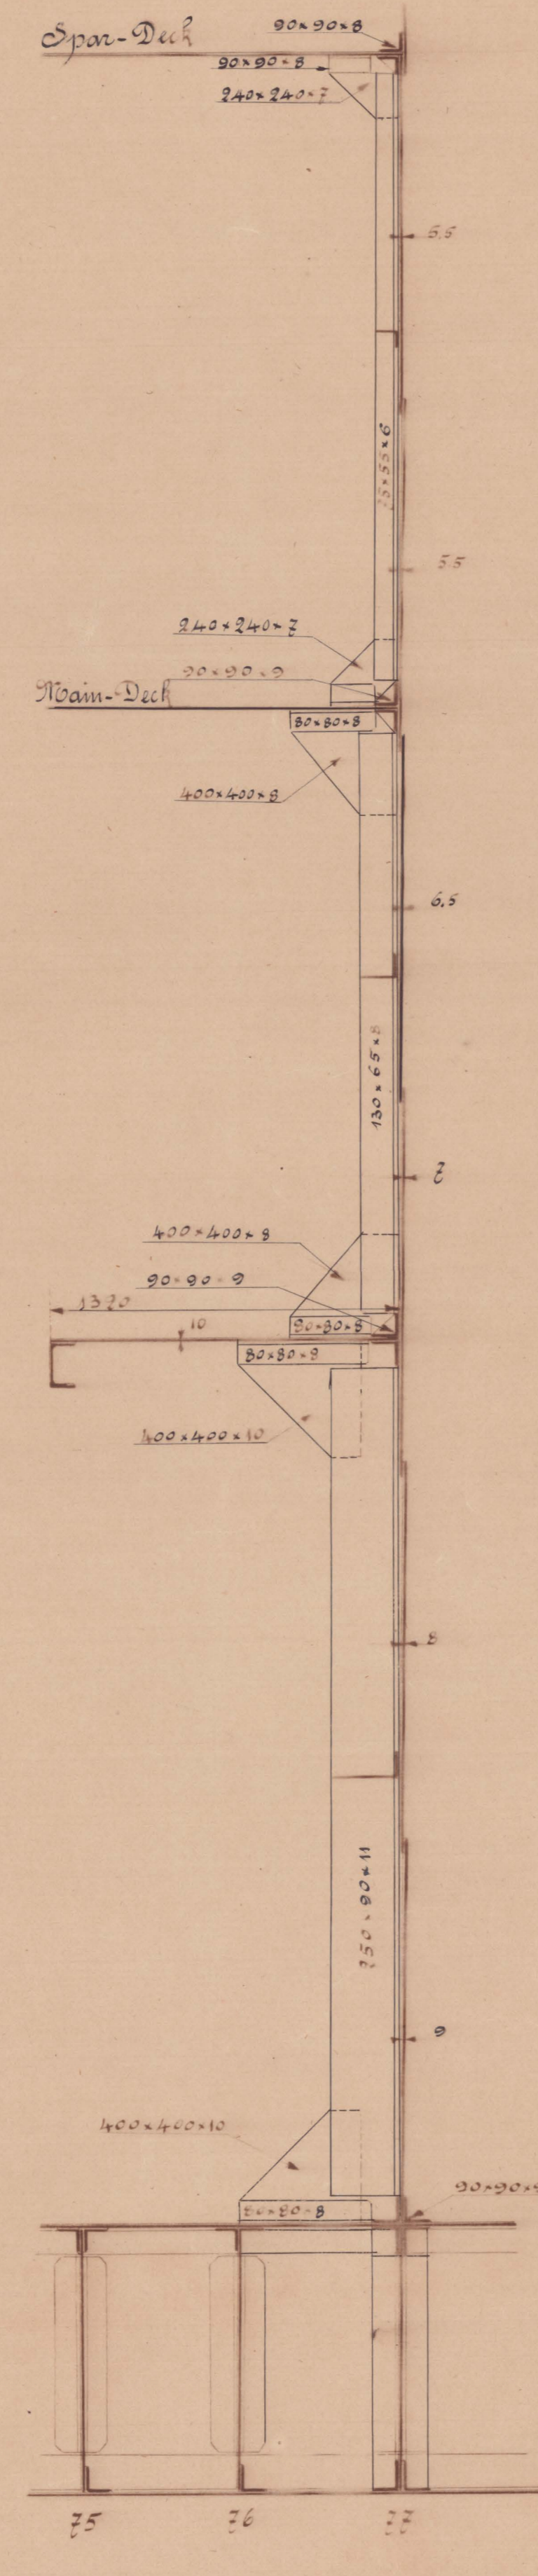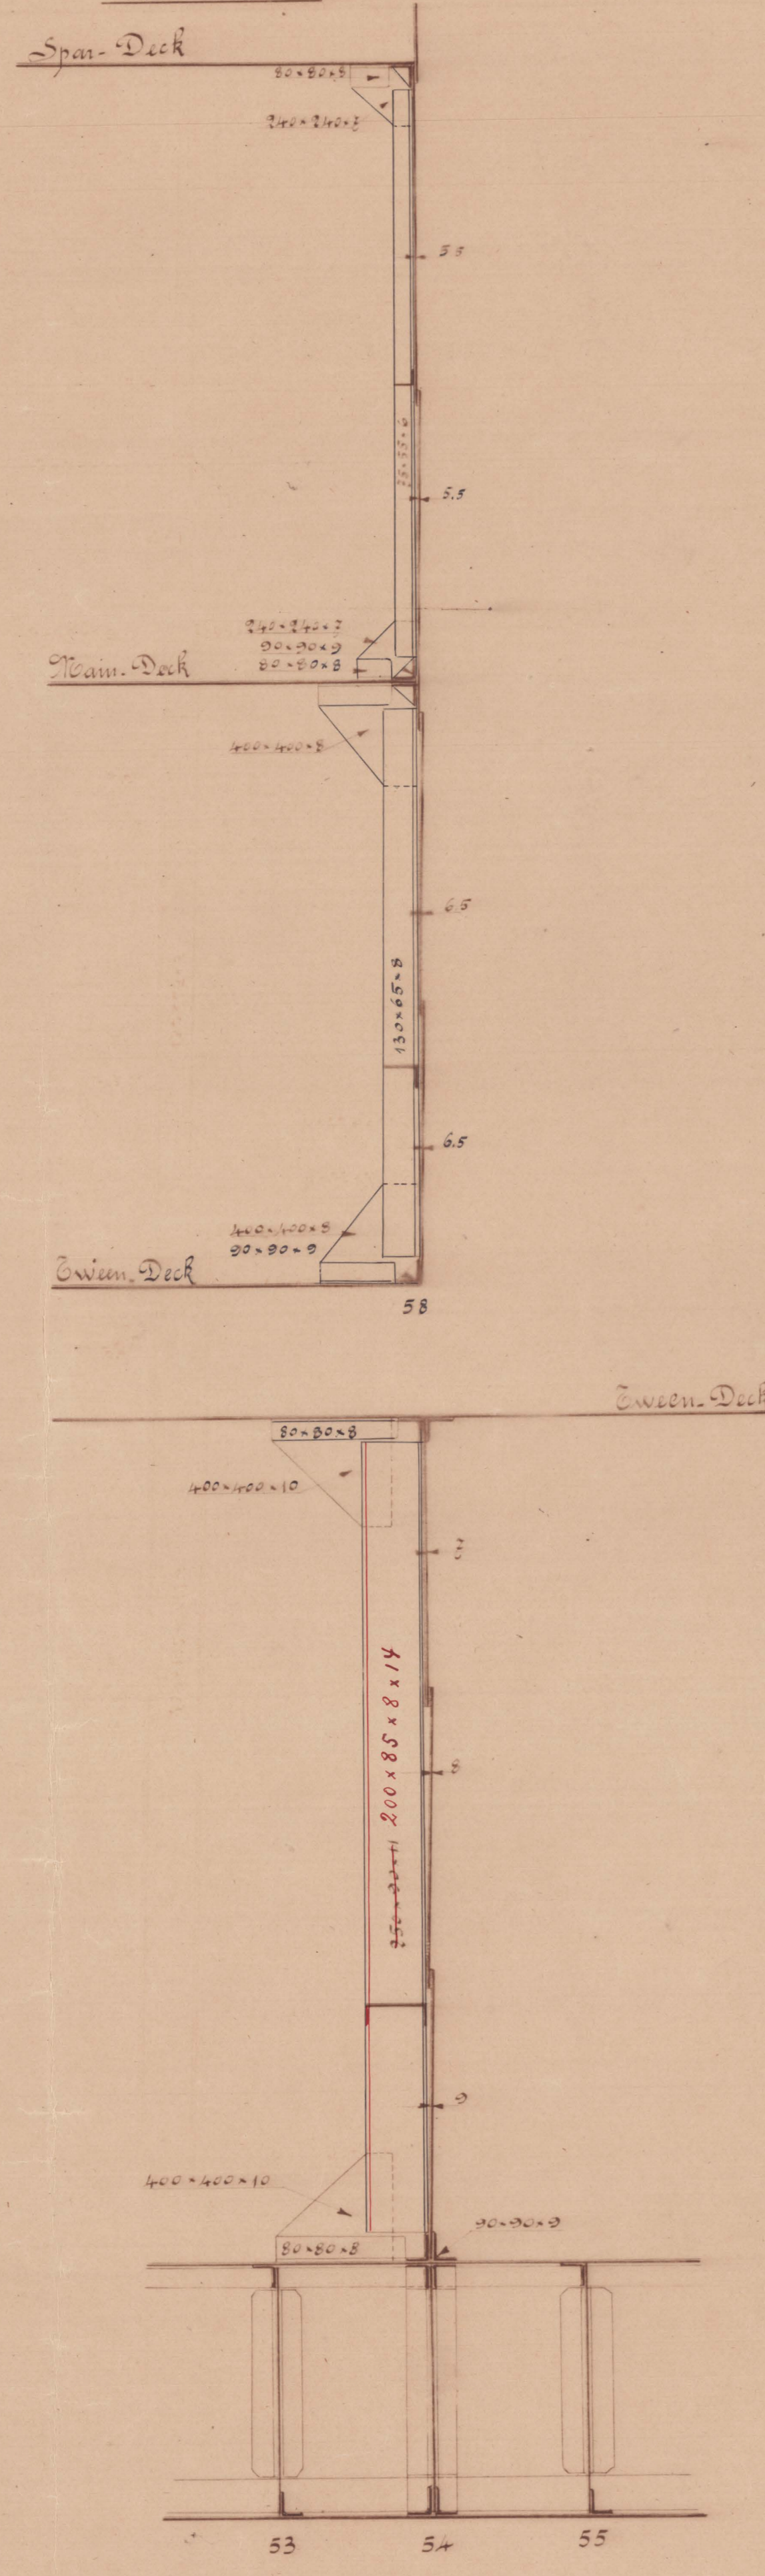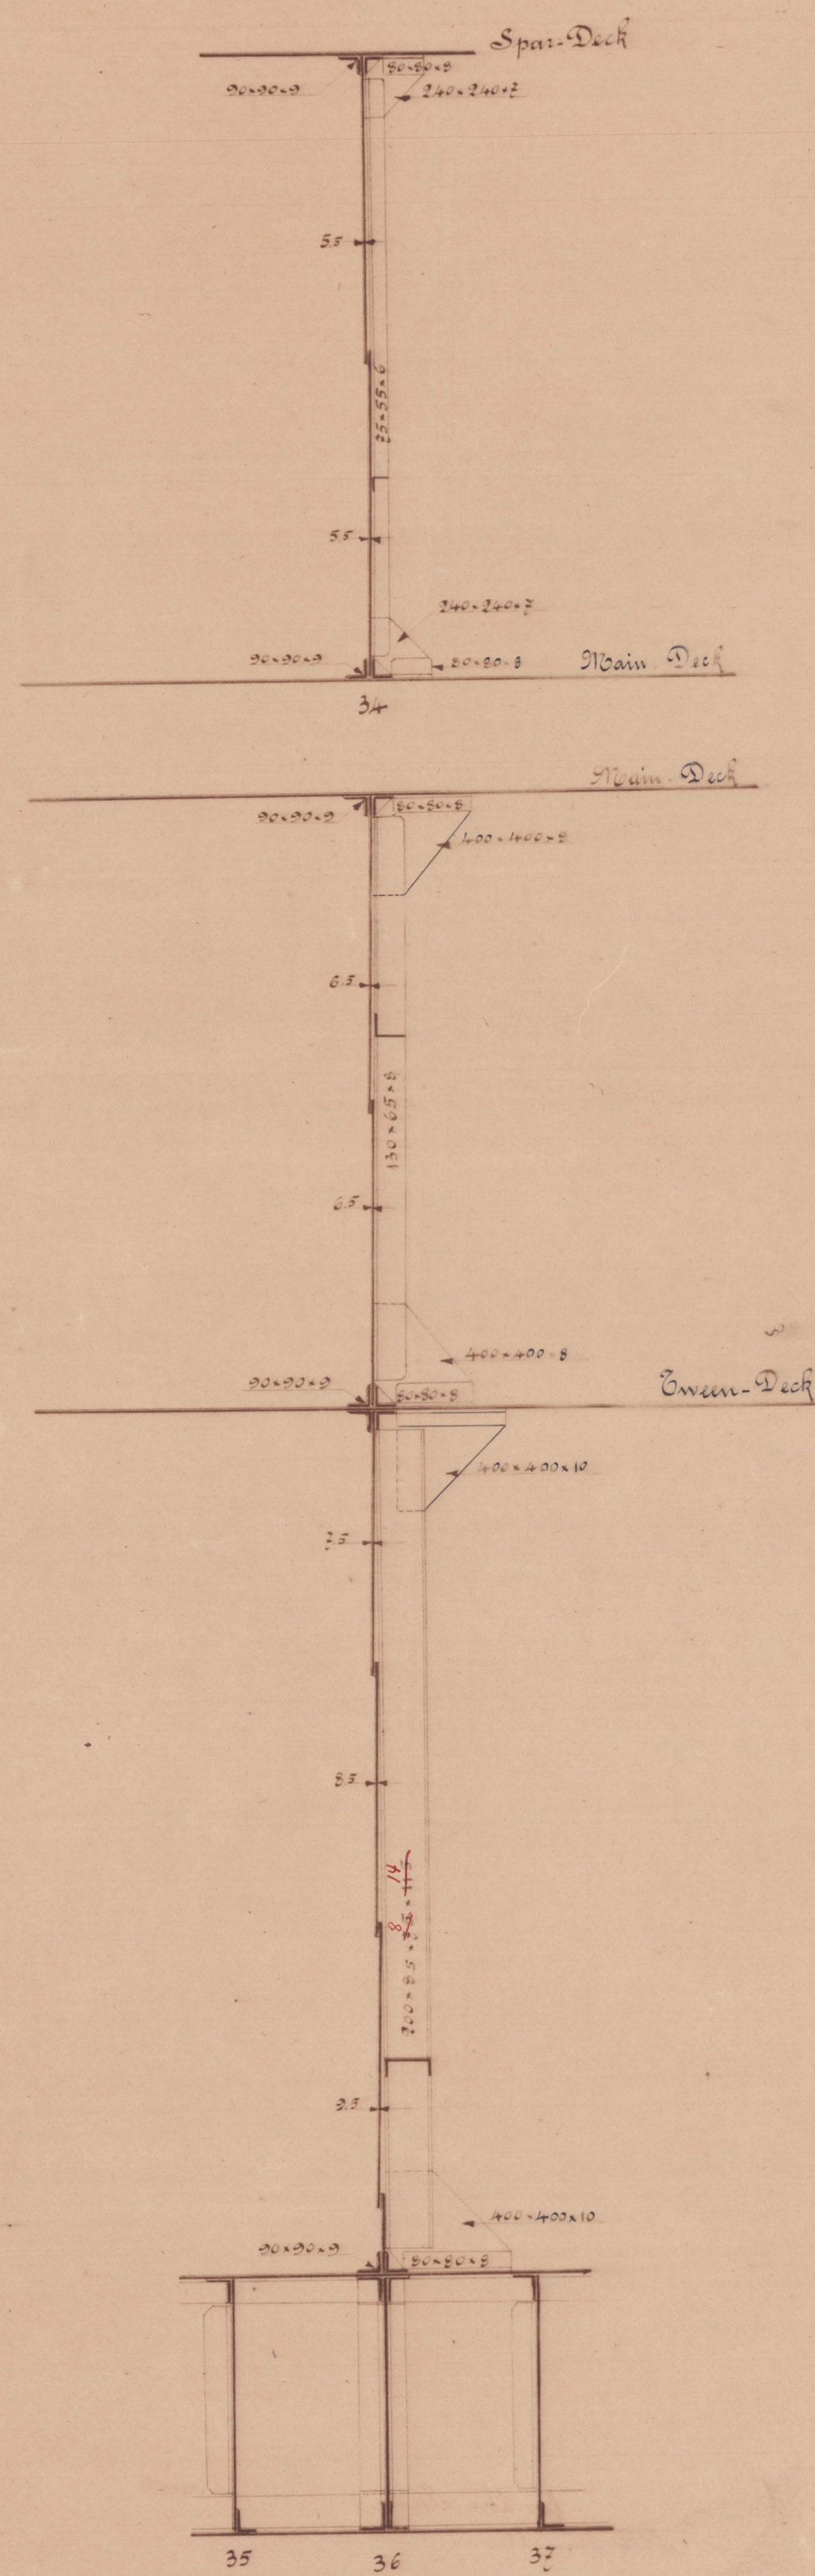

Approved for the class $\times 100$ A.L. with the alterations in red on the understanding that all structural parts not shown in the drawing will be fitted in accordance with the Rules of the Germanischer Lloyd.

Berlin, the 14th January 1904.

Germanischer Lloyd

Handwritten signature